



Power Catwalk

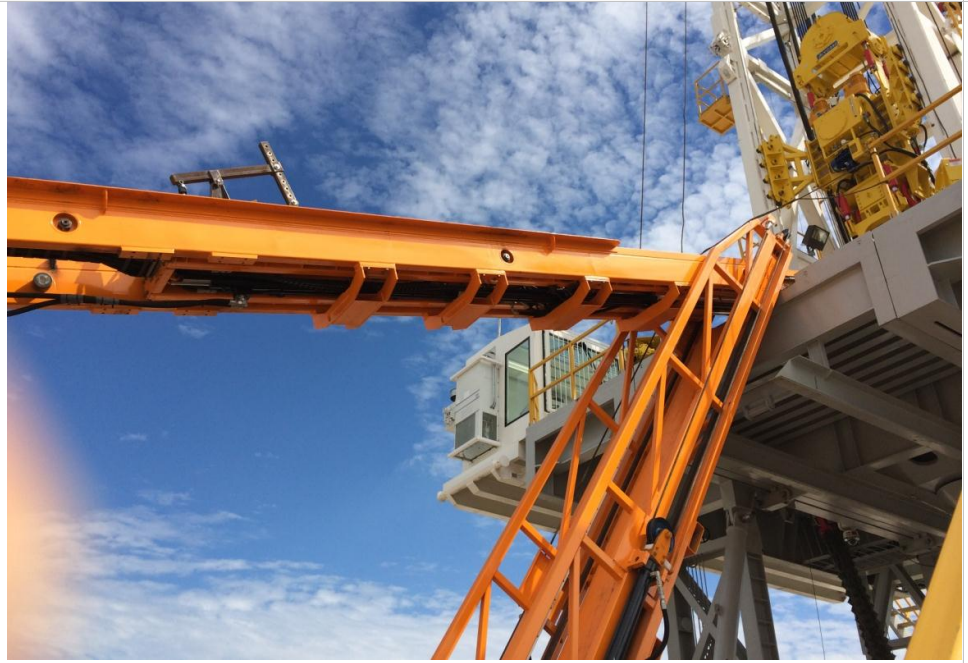

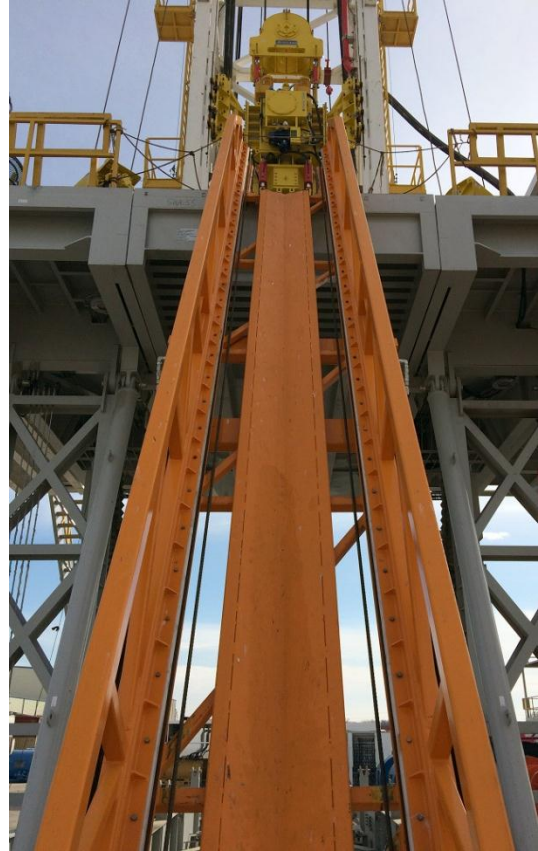

FEATURES	
Fast Installation	Fast transformation from transportation to operation mode by using two hydraulic cylinders to raise up guide tower.
Multi-Function V-door	Guide tower can also be used as a traditional V-door ramp to tripping in or tripping out single tubular.
Efficient	The cycle time to deliver a single tubular from rack to rig floor is as short as 40 seconds.
Remote Control	A wireless control box can remotely manipulate all operation functions within a range of 150 feet.
SPECIFICATION	
Max Tubular Length	48ft
Max Tubular OD	20"
Max Tubular Weight	10,000lbs
Cycle Time	40s
Floor Height Range	29.5~34.4ft
Transport Dimensions	60ft L x 8.5ft W x 8ft H
Gross Weight	59,500lbs
Hydraulic System	75HP, 3,000psi
Power Supply Requirement	480/600V, 3 Phase, 100A